

ONTOSEMSTATS: AN ONTOLOGY TO EXPRESS THE USE OF SEMANTICS IN RDF-BASED KNOWLEDGE GRAPHS

Pierre-Henri Paris, Fayçal Hamdi and Samira si-said Cherfi
pierre-henri.paris@upmc.fr, faycal.hamdi@cnam.fr, samira.cherfi@cnam.fr



1 MOTIVATION

How to choose between two knowledge graphs (KGs) covering the same domain but modeled differently? For example, the first KG could use complex OWL constructs, and the second one only very simple definitions.

Or

How to choose the appropriate tool for a given task, depending on (i) the techniques they use and (ii) the semantics contained in the knowledge graph(s)?




ANSWER :

You need to explore the knowledge graph(s) to find out which classes or properties are defined with the desired semantic features! But this task is time-consuming and is difficult to perform automatically. We have the solution!


2 ONTOLOGY

An ontology to capture the semantics used in a knowledge graph:

<http://cedric.cnam.fr/isid/ontologies/OntoSemStats.owl>

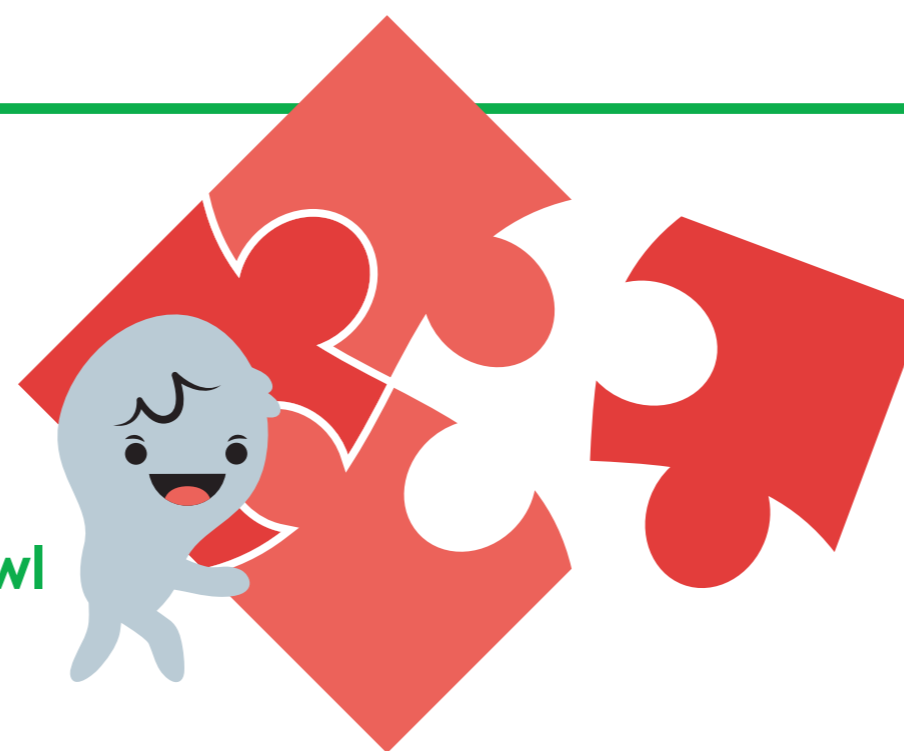


Both users and data publishers will be delighted: the former will find their work easier and the latter will see their data used more often.

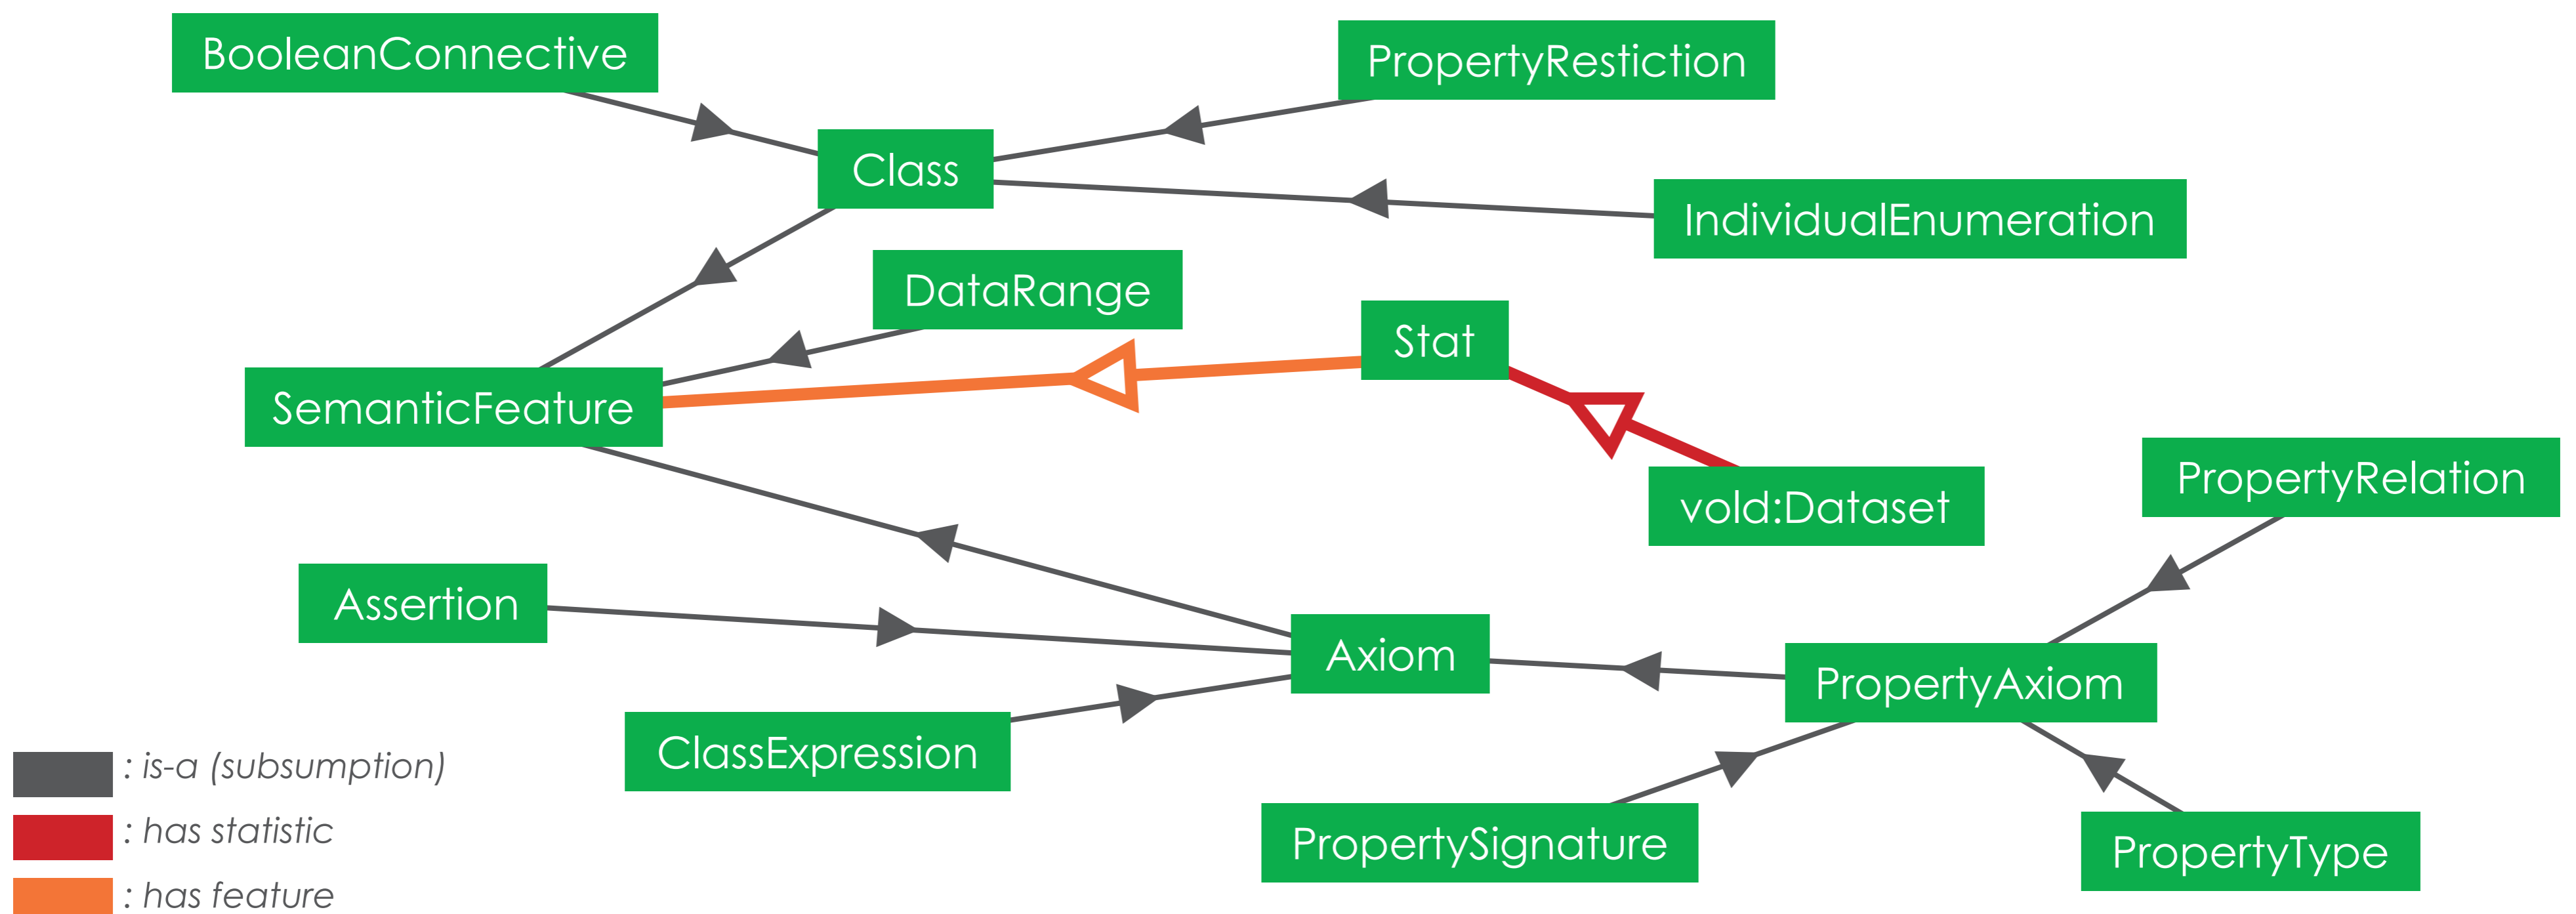

3 TOOLS



To instantiate the ontology for a given SPARQL endpoint, we provide several tools! They are available on GitHub under GPL open-source license

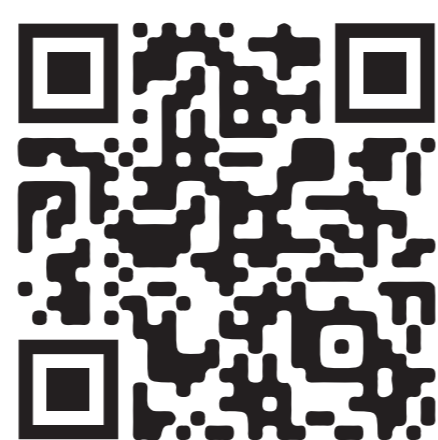

<https://github.com/PHParis/OntoSemStatsWeb>

ONLINE LIVE DEMONSTRATOR
·
COMMAND-LINE
·
WEB API

Used technologies:

